

## U/UTP CAT6 4PR PVC + PE

### STANDARDS

TIA – 568 C2  
IEC 61156-5  
EN 50288-6-1  
ISO/IEC 11801  
EN 50173

### APPLICATIONS

10BASE-T (IEEE 802.3)  
4/16 Mbps TOKEN RING (IEEE 802.5)  
100BASE-VG-AnyLAN  
100 Mbps TP-PMD (ANSI X3T9.5)  
100BASE-T (IEEE 802.3)  
55/155 Mbps ATM  
1000BASE-T (Gigabit Ethernet)  
1.2 Gbps ATM  
10G BASE-T (Length<50m)

### COLOUR CODES

Pairs	Colours Combinations
1	White-Blue / Blue
2	White-Orange / Orange
3	White-Green / Green
4	White-Brown / Brown

Outer sheath colour: Black

### PART NUMBER / PACKAGING

53804A1NGPQ / Spools 500m


53804A1NGP / Spools 1000m

### OTHER CHARACTERISTICS

Storage Temperature -20°C to 70°C  
Operating Temperature -20°C to 70°C

Laying Temperature -5°C to +50°C  
(recommendation: between -5°C and +5°C,  
prior storage 24h at 20°C.)

Edition: January 2013

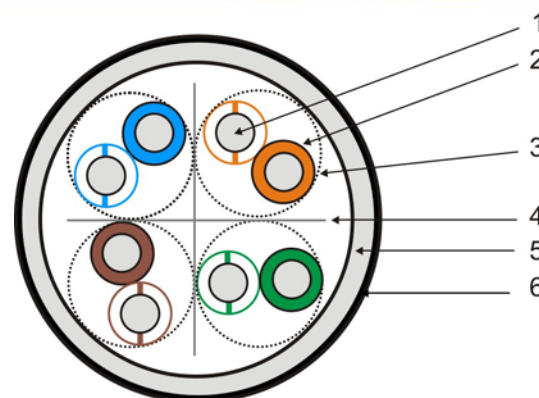

### CONSTRUCTION

- 1 – Conductor: 23 AWG, Solid Bare Annealed Copper.
- 2 – Insulation: Polyolefin.
- 3 – Varying short pair lay-length (4 pairs).
- 4 – Cross Filler
- 5 – Inner Sheath: PVC material
- 6 – Outer Sheath: PE material.

### ELECTRICAL AND DIMENSIONAL CHARACTERISTICS

Max. dc Resistance (Ω/km) @20°C:	93.8
Nom. Mutual Capacity (nF/km)@1kHz:	56
NVP (% of light speed):	65
Mean input Impedance (Ω):	100 ± 5 @ 100MHz
Propagation delay (ns@10MHz):	max. 518
Delay Skew (ns/100m):	max. 40
Coupling Att dB (min.):	@30-100MHz 40 @100-1000MHz 40-20log(f/100)

Approx. outer diameter (mm):	7.4
Approx. weight (kg/km):	53.0
Min. bending radius (mm):	29.6

### TRANSMISSION CHARACTERISTICS

Freq	ATTN	NEXT	PS-NEXT	ELFEXT	PS-ELFEXT	ACR	PS-ACR	RL
MHz	dB/100m (max.)	dB (min.)	dB (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB/100m (min.)	dB (min.)
1*	2.0	75.3	72.3	68.0	65.0	73.2	70.2	20.0
4	3.8	66.3	63.3	58.0	55.0	62.5	59.5	23.0
8	5.2	61.8	58.8	51.9	48.9	56.5	53.5	24.5
10	5.9	60.3	57.3	50.0	47.0	54.4	51.4	25.0
16	7.4	57.2	54.2	45.9	42.9	49.9	46.9	25.0
25	9.2	54.3	51.3	42.0	39.0	45.0	42.0	24.3
31.25	10.3	52.9	49.9	40.1	37.1	42.6	39.6	23.6
62.5	14.5	48.4	45.4	34.1	31.1	33.8	30.8	21.5
100	18.4	45.3	42.3	30.0	27.0	26.9	23.9	20.1
155	22.9	42.4	39.4	26.2	23.2	19.5	16.5	18.8
200	26.1	40.8	37.8	24.0	21.0	14.7	11.7	18.0
250	29.2	39.3	36.3	22.0	19.0	10.1	7.1	17.3
300*	32.0	38.1	35.1	20.5	17.5	6.1	3.1	17.3
350*	34.7	37.1	34.1	19.1	16.1	2.5	1.0	17.3

\* For information only.

Note: DATA cables are not suitable for low impedance applications as: heating, lighting, etc...

No reproduction without the written consent of General Cable –General Cable reserves the right to change the specifications for improvement without notice.

#### PORTUGAL

Tlf. +351 21 967 85 00  
www.generalcable.pt  
info@generalcable-pt.com

#### FRANCE

Tlf. +33(0)1 60 57 31 51  
www.sillecable.com  
contact@sillecable.com

#### SPAIN

Tlf. +34 93 227 97 00  
www.generalcable.es  
info@generalcable.es